

S  
O  
U  
S

V  
I  
D  
E



Vacuum packaging liquid and dry products, powder, soft and solid products...

- Auto-Vacuum process ensures that you get constant results no matter the size or quantity of products you are vacuum packaging.
- 40 or 63 m<sup>3</sup>/h Busch pump with high efficiency, reliable and robust evacuation of oxygen up to 99.999% (at 2 mbars)
- Sealing bars: 2 x 20" (or 2 x 26")  
Distance between sealing bars: 24.5" (or 17.5")
- Inside chamber dimension: 20" x 26" x 9.25"





### Auto mode: always consistent and accurate

The Auto-vacuum mode performs a complete MAP or full vacuum packaging process smartly. Whatever is your product, the Hi-Tech Auto series machines adjust the running process entirely by itself to ensure that you get the result you




### Programmable: the way you want

Memorizing up to 15 different programmable settings for your specialized products.



### Autoclean: always optimal

Auto-cleaning process helps you keep your unit and pump at their optimized performance and extend their life.

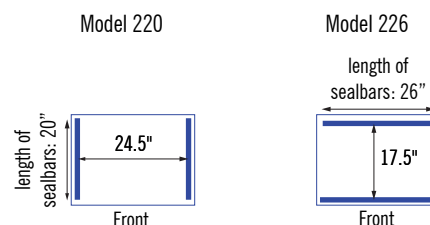

Roomy chamber with 9.25" height and two sealbars.



Equipped with 40 or 63 m<sup>3</sup>/h, 115V, 1 phase, 60 Hz, 2 or 3 HP



## Designed features



- Busch pump with high efficiency, reliable and robust to ensure high vacuum level up to 2 mbars, and able to run long hours of non-stop production.
- Uniform and weld-sealing (tear resistant) with two (2) V-shape Ni-Cr wires RoSH compliant on each seal bar.
- Chamber is designed roomy to fit large cuts.
- Our dimensions are designed for maximum arrangements of various North American pouches size.
- Adjustable shims with easy set-up supports help you dispose and manipulate pouches fast and easy.
- Wide open dome lid facilitates fast loading and unloading of pouches.
- Unobstructed visual control of packaging process with whole see-through lid.

## Tech Specs

### Standard features

### Option

Busch pump	40 or 63 m <sup>3</sup> /h, ultimate pressure of 2 mbar	
Electrical requirement	203-575 VAC, 3 phases	
Overall dimension	30" x 28" x 66" (lid opened)	
Inside chamber size	20" x 26" x 9" 1/4	
Length of seal bars	2 x 20" or 2 x 26"	Integrated bags cut-off in seal bar
Weight (approx.)	410 lbs	
Sealing element	two (2) Ni-Cr wires, RoHS compliant	Heavy duty sealing
Duty cycle	from 8 to 90 seconds	Customized for special applications
Chamber	Aluminum with white epoxy powder coating	High grade stainless steel
Working surface	Plastic HDPE shims	
Ready for gas flush	Easy plug-in terminal ready on unit	Gas flush option kit



HI-TECH VACUUM inc., 1445A, RR5, Saint-Cyrille-de-Wendover, Quebec, J1Z 1S5 Canada  
 Tel.: (819) 397-4888 Fax: (819) 397-4644  
 Web: www.hitechvacuum.com email: info@hitechvacuum.com



Designed and made in Canada