

S
O
U
S


V
I
D
E



Vacuum packaging liquid and dry products, powder, soft and solid products...

- Auto-Vacuum process ensures that you get constant results no matter the size or quantity of products you are vacuum packaging
- 40 m³/h Busch pump with high efficiency, reliable and robust
Oxygen evacuation up to 99.999% (at 2 mbar)
- Sealing bars: 4 x 16" (or 4 x 19")
Distance between sealing bars: 16.5" (or 14")
- Inside chamber dimension: 21.5" x 16.5" x 7.5"



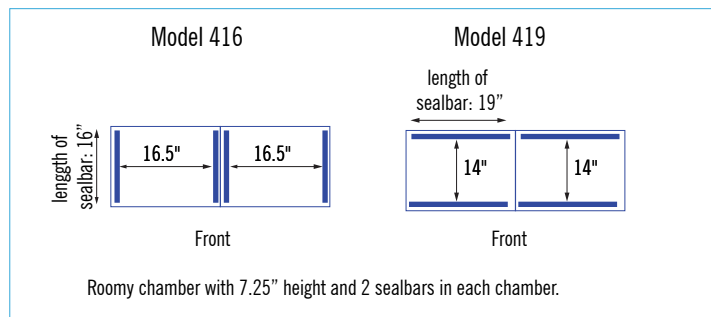

Auto mode: always consistent and accurate

The Auto-vacuum mode performs a complete MAP or full vacuum packaging process smartly. Whatever is your product, the Hi-Tech Auto series machines adjust the running process entirely by itself to ensure that you get the result you



Programmable: the way you want

Memorizing up to 15 different programmable settings for your specialized products.



Autoclean: always optimal

Auto-cleaning process helps you keep your unit and pump at their optimized performance and extend their life.



Equipped with 40 m³/h, 203-575 VAC, 3 phases, 60 Hz, 2 HP



Designed features



- Busch pump with high efficiency, reliable and robust to ensure high vacuum level up to 2 mbars, and able to run long hours of non-stop production.
- Uniform and weld-sealing (tear resistant) with two (2) V-shape Ni-Cr wires RoSH compliant on each seal bar.
- Chamber is designed roomy to fit large cuts.
- Our dimensions are designed for maximum arrangements of various North American pouches size.
- Adjustable shims with easy set-up supports help you dispose and manipulate pouches fast and easy.
- Wide open dome lid facilitates fast loading and unloading of pouches.
- Unobstructed visual control of packaging process with whole see-through lid.

Tech Specs

Standard features

Option

Busch pump	40 m ³ /h, ultimate pressure of 2 mbar	
Electrical requirement	230-575 VAC, 3 phases	
Overall dimension	47" x 25.25" x 40" (lid opened)	
Inside chamber size	16" 3/4 x 19" 1/2 x 7" 1/2	
Length of seal bars	4 x 16" or 4 x 19"	Integrated bags cut-off in seal bar
Weight (approx.)	425 lbs	
Sealing element	two (2) Ni-Cr wires, RoHS compliant	Heavy duty sealing
Duty cycle	from 8 to 90 seconds	Customized for special applications
Chamber	Aluminum with white epoxy powder coating	High grade stainless steel
Working surface	Plastic HDPE shims	
Ready for gas flush	Easy plug-in terminal ready on unit	Gas flush option kit



HI-TECH VACUUM inc., 1445A, RR5, Saint-Cyrille-de-Wendover, Quebec, J1Z 1S5 Canada
 Tel.: (819) 397-4888 Fax: (819) 397-4644
 Web: www.hitechvacuum.com email: info@hitechvacuum.com



Designed and made in Canada