

S
O
U
S

V
I
D
E





Simplicity in learning, operating, cleaning and maintenance

- 100 or 165 m³/h Busch pump with high efficiency, reliable and robust
Oxygen evacuation up to 99.999% (at 2 mbar)
- Sealing bars: 4 x 25.5"
Distance between sealing bars: 24.5"
- Inside chamber dimension: 26" x 25" x 7" (or 9" height)
- Heavy duty construction and designed for fast production



Specifications

Model SW426

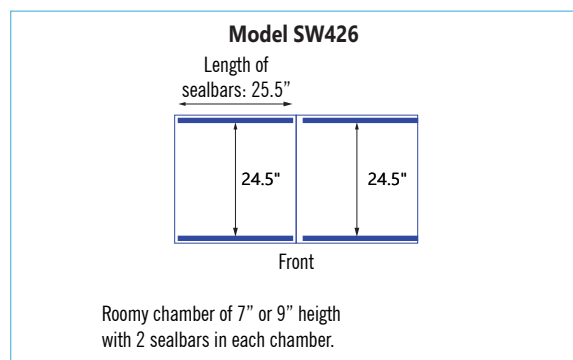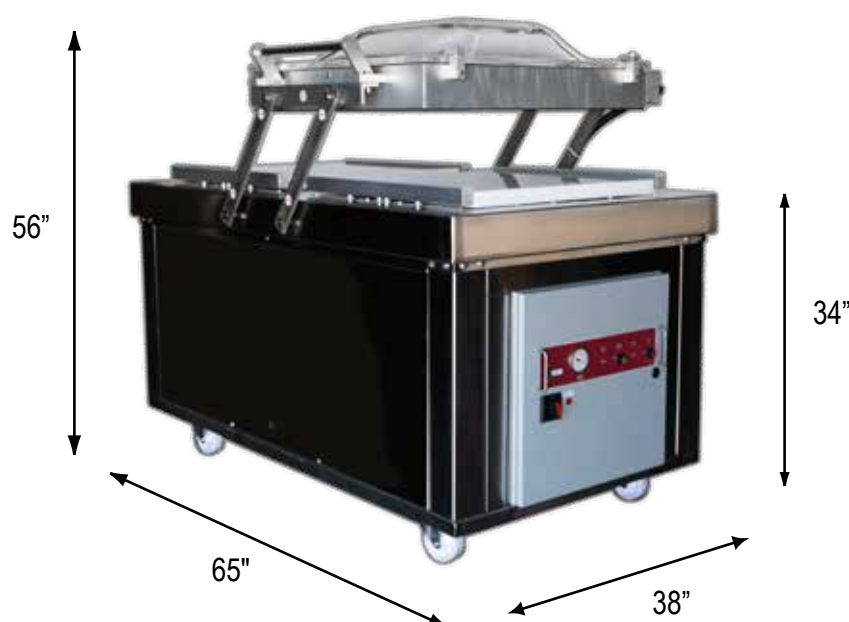

Equipped with 100 or 165 m³/h, 203-575 VAC, 3 phases, 60 Hz, 5 or 7.5 HP



Designed features



- Busch pump with high efficiency, reliable and robust to ensure high vacuum level up to 2 mbars, and able to run long hours of non-stop production.
- Uniform and weld-sealing (tear resistant) with two (2) V-shape Ni-Cr wires RoSH compliant on each seal bar.
- Chamber is designed roomy to fit large cuts.
- Our dimensions are designed for maximum arrangements of various North American pouches size.
- Adjustable shims with easy set-up supports help you dispose and manipulate pouches fast and easy.
- Wide open dome lid facilitates fast loading and unloading of pouches.
- Unobstructed visual control of packaging process with whole see-through lid.

Tech Specs

Standard features

Option

Busch pump	100 (or 165) m ³ /h, ultimate pressure of 2 mbar	
Electrical requirement	230-575 VAC, 3 phases	
Overall dimension	65" x 38" x 56" (lid opened)	
Inside chamber size	26.75" x 25.5" x 7"	Height of 9"
Length of seal bars	4 x 25.5"	Integrated bags cut-off in seal bar
Weight (approx.)	635 lbs	
Sealing element	two (2) Ni-Cr wires on each sealbar, RoHS compliant	Heavy duty sealing
Duty cycle	from 8 to 90 seconds	Customized for special applications
Chamber	High grade stainless steel and anodized aluminum	
Working surface	Plastic HDPE shims	



HI-TECH VACUUM inc., 1445A, RR5, Saint-Cyrille-de-Wendover, Quebec, J1Z 1S5 Canada
 Tel.: (819) 397-4888 Fax: (819) 397-4644
 Web: www.hitechvacuum.com email: info@hitechvacuum.com



Designed and made in Canada